


TGS Mounting Post Ground Socket

For use on Models MSS-12 and TM-12

PARTS LIST

<u>Code #</u>	<u>Qty</u>	<u>Description</u>
28410	1	1-3/4" x 22" Ground socket
28024	2	Tube clamp
42500	2	1/4-20 Hex nut
43550	2	1/4" Lock washer
30053	2	1/4-20x1-1/4" Carriage bolt

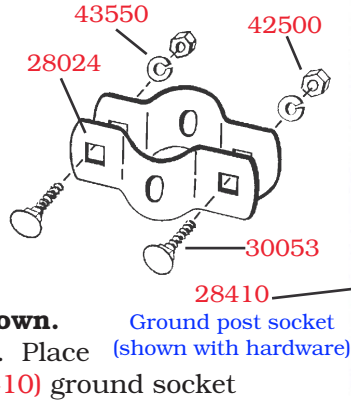

Instructions

1. Assemble tube clamps (28024) as shown.


Start nuts (42500), but do not tighten. Place assembly over slotted end of TGS (28410) ground socket and tighten nuts (42500) just enough to hold in position.

2. Slide pole bottom section into ground socket from top end 18" and tighten nuts (42500) until pole section is secure.

3. Dig hole approx. 8" diameter and 26" deep. Put coarse gravel in bottom of hole until top of ground socket (28410) is to ground level (22").

4. Place crumpled newspaper inside lower end of socket to prevent concrete from sealing pole. This method will allow any water to drain from inside pole.

5. Place ground socket and post section in hole and fill with concrete to 4" below ground level. (Approx. 90 pounds.) Use guy wires or rope to hold post in vertical position while concrete sets up.

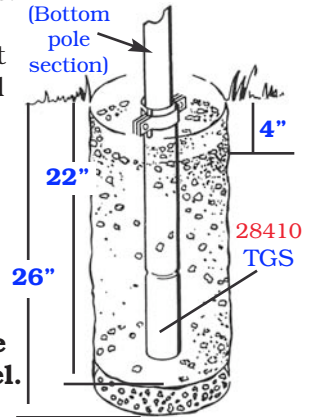

Allow sufficient clearance above concrete to use wrench on clamp.

6. After concrete has hardened, loosen tube clamps and lower post bottom section to bottom of socket, Then re-tighten clamps. House installation can now be completed.

For replacement parts or accessories call toll-free 800-255-2692



NATURE HOUSE

www.erva.com

Nature House products by

ERVA TOOL & MFG CO INC

3100 W GRAND AVE, CHICAGO IL 60622-4324



Phone 800-342-3782

E-mail <ervatool@sbcglobal.net>

Fax 800-342-3781

Nature House — bringing the benefits of nature to your house